查询BUZ45B供应商

10A, 500V, 0.500 Ohm, N-Channel Power MOSFET

This is an N-Channel enhancement mode silicon gate power field effect transistor designed for applications such as switching regulators, switching converters, motor drivers, relay drivers, and drivers for high power bipolar switching transistors requiring high speed and low gate drive power. This type can be operated directly from integrated circuits.

Formerly developmental type TA17435.

Ordering Information

PART NUMBER	PACKAGE	BRAND
BUZ45B	TO-204AA	BUZ45B

NOTE: When ordering, use the entire part number.

Features

- 10A, 500V
- $r_{DS(ON)} = 0.500\Omega$
- SOA is Power Dissipation Limited
- Nanosecond Switching Speeds
- Linear Transfer Characteristics
- High Input Impedance
- Majority Carrier Device

Symbol



Packaging

JEDEC TO-204AA

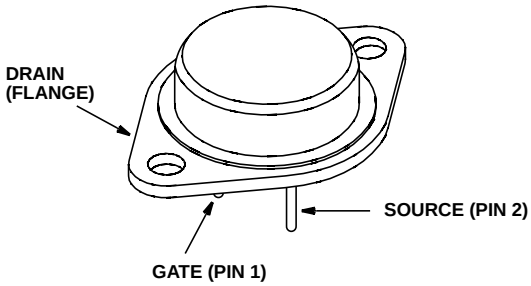

CAUTION: These devices are sensitive to electrostatic discharge; follow proper IC Handling Procedures.
1-800-4-HARRIS | Copyright © Harris Corporation 1998

Absolute Maximum Ratings $T_C = 25^oC$, Unless Otherwise Specified

		BUZ45B	UNITS
Drain to Source Breakdown Voltage (Note 1)	V_{DS}	500	V
Drain to Gate Voltage (R_{GS} = 20kΩ) (Note 1)	V_{DGR}	500	V
Continuous Drain Current ($T_C = 35^oC$)	I_D	10	A
Pulsed Drain Current (Note 3)	I_{DM}	40	A
Gate to Source Voltage	V_{GS}	±20	V
Maximum Power Dissipation	P_D	125	W
Linear Derating Factor		1.0	$W/^oC$
Operating and Storage Temperature	T_J, T_{STG}	-55 to 150	^oC
DIN Humidity Category - DIN 40040		E	
IEC Climatic Category - DIN IEC 68-1		55/150/56	
Maximum Temperature for Soldering Leads at 0.063in (1.6mm) from Case for 10s	T_L	260	^oC

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

1. $T_J = 25^oC$ to 125^oC.

Electrical Specifications $T_C = 25^oC$, Unless Otherwise Specified

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Drain to Source Breakdown Voltage	BV_{DSS}	I_D = 250μA, V_{GS} = 0V	500	-	-	V
Gate to Threshold Voltage	$V_{GS(TH)}$	$V_{GS} = V_{DS}$, I_D = 1mA (Figure 9)	2.1	3	4	V
Zero Gate Voltage Drain Current	I_{DSS}	$T_J = 25^oC$, V_{DS} = 500V, V_{GS} = 0V	-	20	250	μA
		$T_J = 125^oC$, V_{DS} = 500V, V_{GS} = 0V	-	100	1000	μA
Gate to Source Leakage Current	I_{GSS}	V_{GS} = 20V, V_{DS} = 0V	-	10	100	nA
Drain to Source On Resistance (Note 2)	$r_{DS(ON)}$	I_D = 5A, V_{GS} = 10V (Figure 8)	-	0.49	0.50	Ω
Forward Transconductance (Note 2)	g_{fs}	V_{DS} = 25V, I_D = 5A (Figure 11)	2.7	5	-	S
Turn-On Delay Time	$t_{d(ON)}$	V_{CC} = 30V, $I_D \approx$ 2.9A, V_{GS} = 10V, R_{GS} = 50Ω, R_L = 10Ω. (Figures 14, 15)	-	50	75	ns
Rise Time	t_r		-	80	120	ns
Turn-Off Delay Time	$t_{d(OFF)}$		-	330	430	ns
Fall Time	t_f		-	110	140	ns
Input Capacitance	C_{ISS}	V_{DS} = 25V, V_{GS} = 0V, f = 1MHz (Figure 10)	-	3800	4900	pF
Output Capacitance	C_{OSS}		-	250	400	pF
Reverse Transfer Capacitance	C_{RSS}		-	100	170	pF
Thermal Resistance Junction to Case	$R_{\theta JC}$		≤ 1			$^oC/W$
Thermal Resistance Junction to Ambient	$R_{\theta JA}$		≤ 35			$^oC/W$

Source to Drain Diode Specifications

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Continuous Source to Drain Current	I_{SD}	$T_C = 25^oC$	-	-	10	A
Pulsed Source to Drain Current	I_{SDM}		-	-	40	A
Source to Drain Diode Voltage	V_{SD}	$T_J = 25^oC$, I_{SD} = 20A, V_{GS} = 0V	-	1.3	1.7	V
Reverse Recovery Time	t_{rr}	$T_J = 25^oC$, I_{SD} = 10A, dI_{SD}/dt = 100A/μs, V_R = 100V	-	1200	-	ns
Reverse Recovery Charge	Q_{RR}		-	12	-	μC

NOTES:

2. Pulse Test: Pulse width ≤ 300μs, duty cycle ≤ 2%.
3. Repetitive rating: pulse width limited by maximum junction temperature. See Transient Thermal Impedance curve (Figure 3).

Typical Performance Curves Unless Otherwise Specified

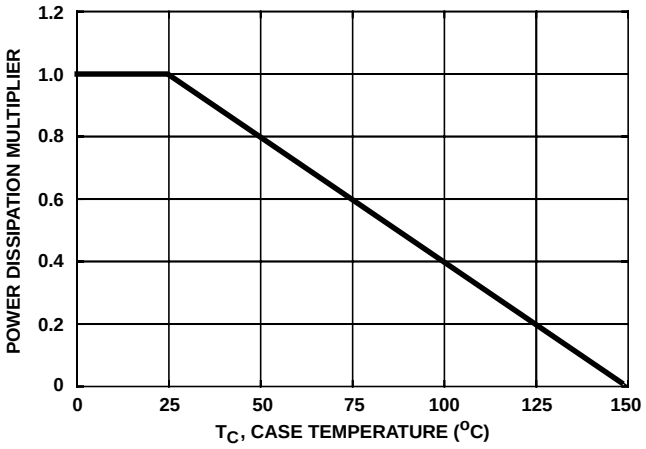

FIGURE 1. NORMALIZED POWER DISSIPATION vs CASE TEMPERATURE

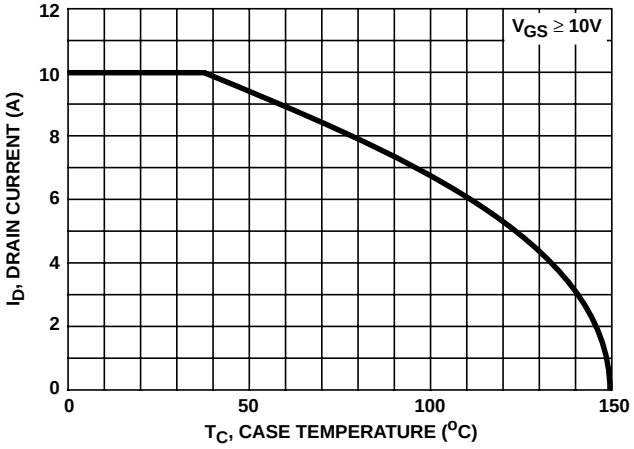

FIGURE 2. MAXIMUM CONTINUOUS DRAIN CURRENT vs CASE TEMPERATURE

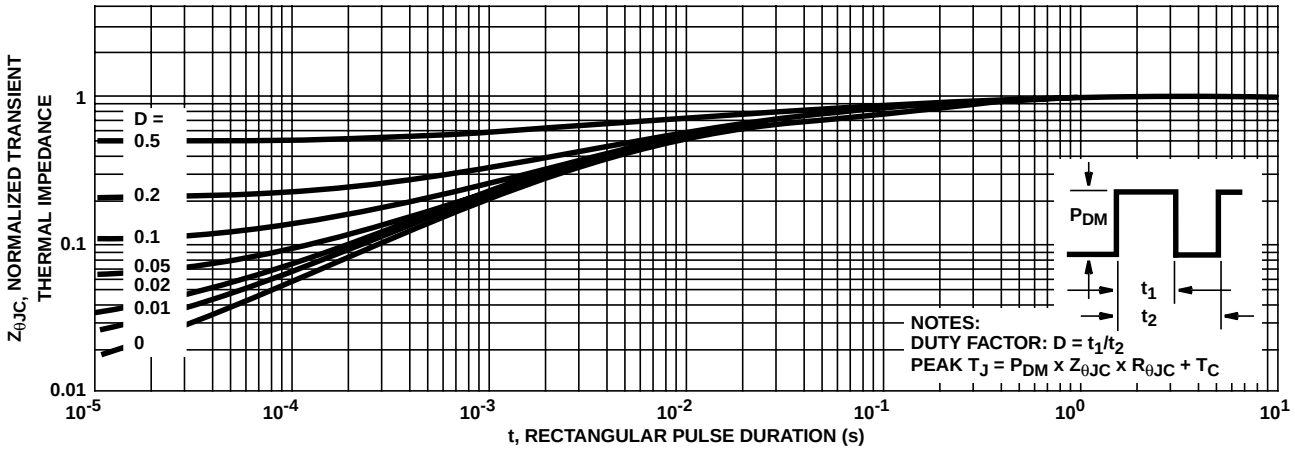

FIGURE 3. NORMALIZED MAXIMUM TRANSIENT THERMAL IMPEDANCE

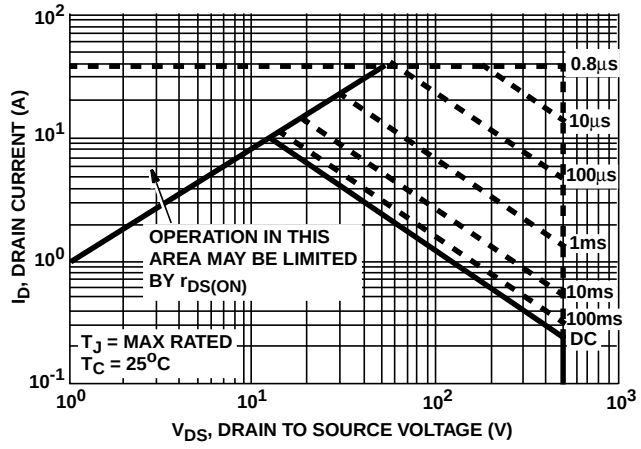

FIGURE 4. FORWARD BIAS SAFE OPERATING AREA

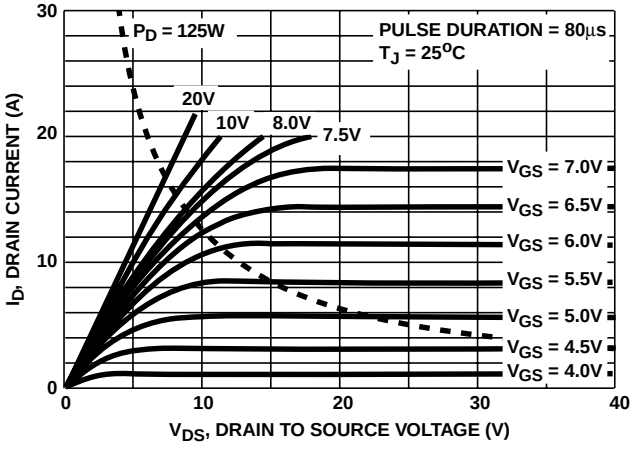

FIGURE 5. OUTPUT CHARACTERISTICS

Typical Performance Curves Unless Otherwise Specified (Continued)

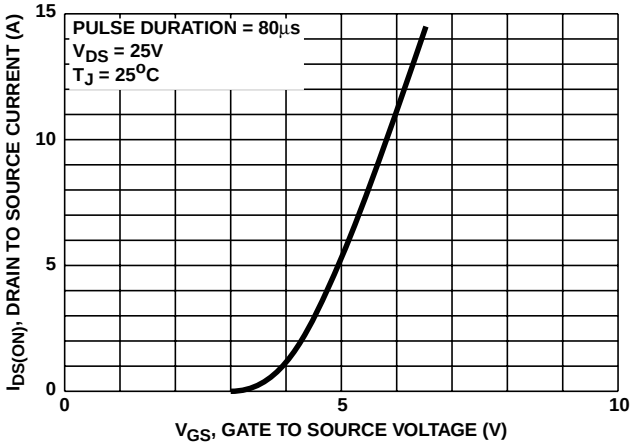

FIGURE 6. TRANSFER CHARACTERISTICS

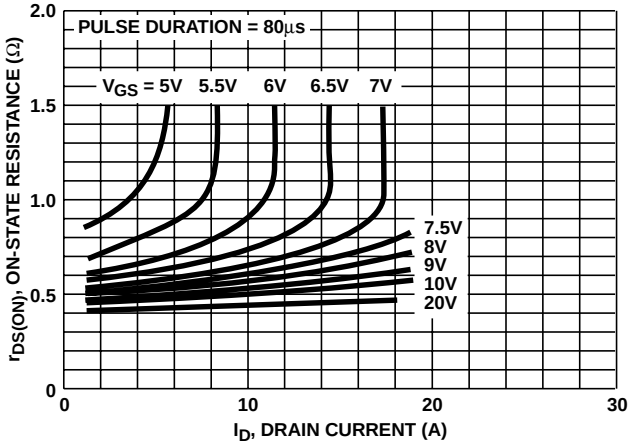

FIGURE 7. DRAIN TO SOURCE ON RESISTANCE vs GATE VOLTAGE AND DRAIN CURRENT

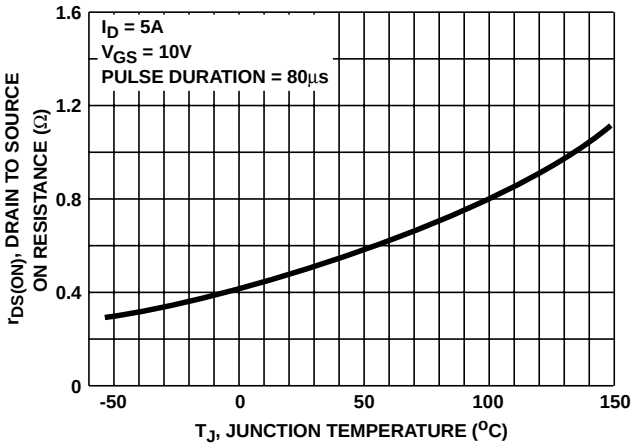

FIGURE 8. DRAIN TO SOURCE ON RESISTANCE vs JUNCTION TEMPERATURE

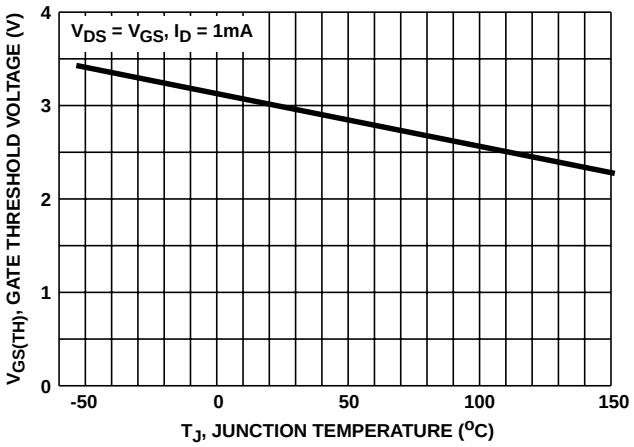

FIGURE 9. GATE THRESHOLD VOLTAGE vs JUNCTION TEMPERATURE

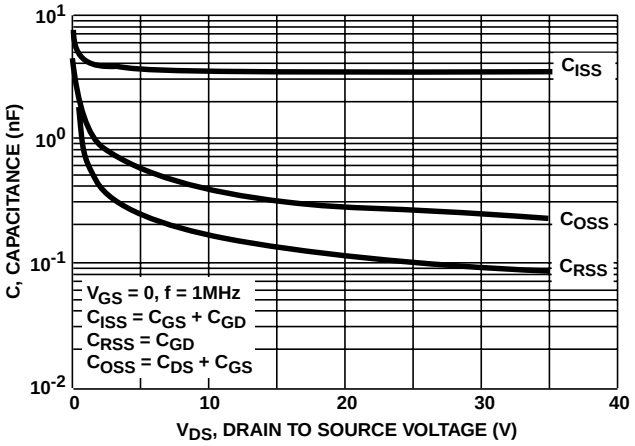

FIGURE 10. CAPACITANCE vs DRAIN TO SOURCE VOLTAGE

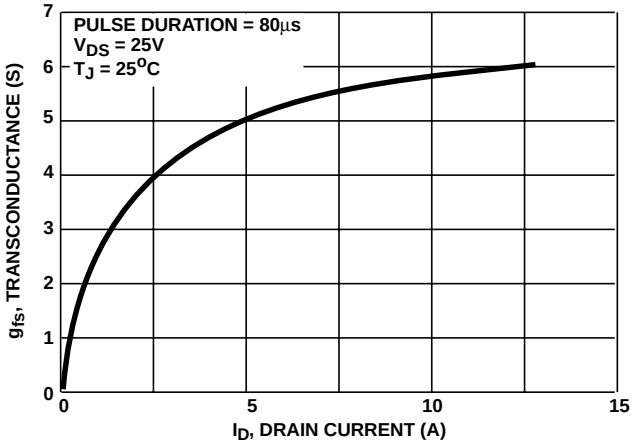

FIGURE 11. TRANSCONDUCTANCE vs DRAIN CURRENT

Typical Performance Curves Unless Otherwise Specified (Continued)

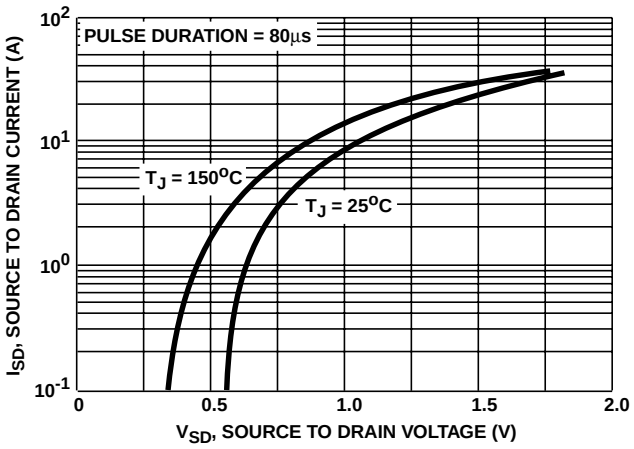

FIGURE 12. SOURCE TO DRAIN DIODE VOLTAGE

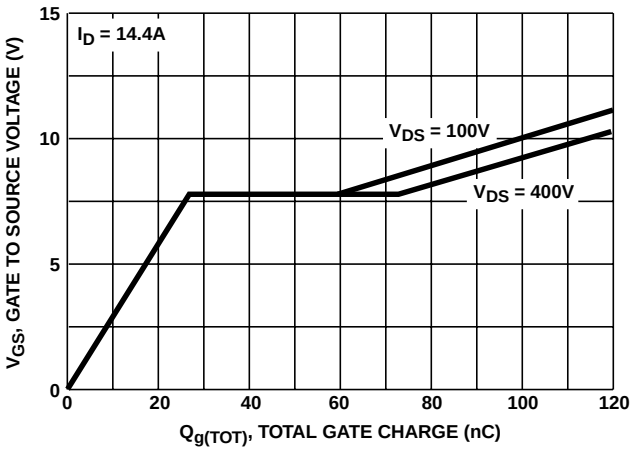

FIGURE 13. GATE TO SOURCE VOLTAGE vs GATE CHARGE

Test Circuits and Waveforms

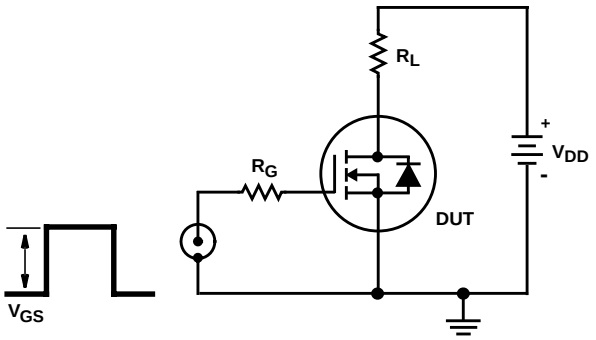

FIGURE 14. SWITCHING TIME TEST CIRCUIT

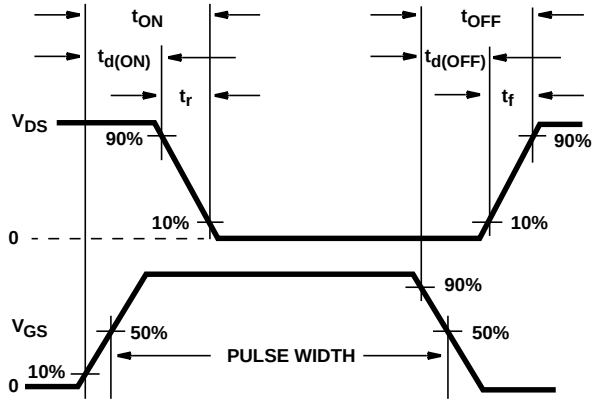

FIGURE 15. RESISTIVE SWITCHING WAVEFORMS

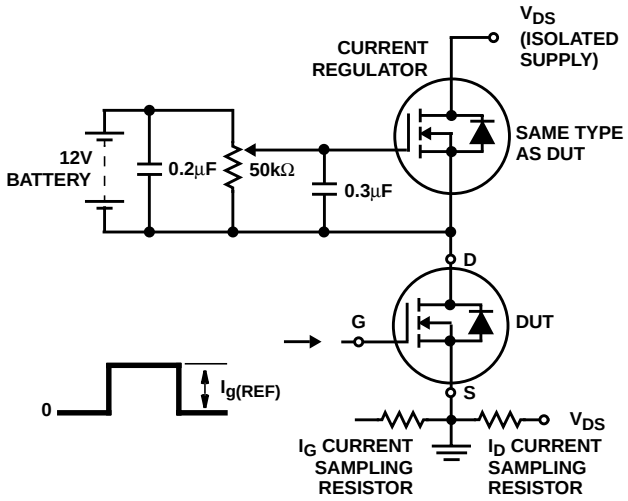

FIGURE 16. GATE CHARGE TEST CIRCUIT

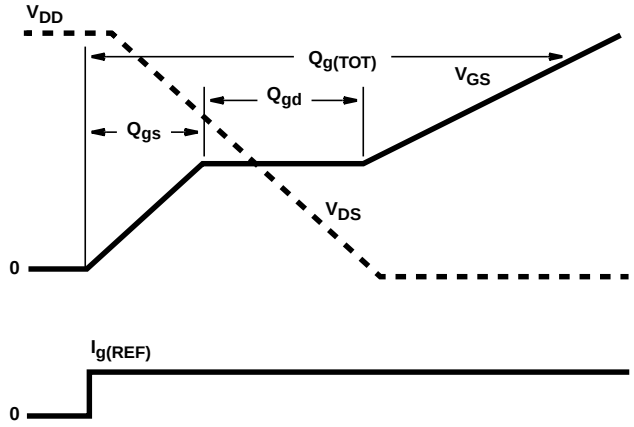

FIGURE 17. GATE CHARGE WAVEFORMS